



Bedrijf	Eurofresh NV.
Adres	Dorpsstraat 14
Postcode & Plaats	3950 Bocholt (BE)
Contactpersoon	Nathalie Laureyns
Telefoonnummer	+32 89 46 93 80
Artikel	Ø50mm stickers
Artikel	300x25mm bandstickers

Facestock

A white, one side machine coated, woodfree printing paper with semi-gloss appearance. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	80 g/m ²	ISO 536
Caliper	69 µm	ISO 534

Adhesive

A general purpose permanent, rubber based adhesive.

Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	57 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	134 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	22 N/25mm	FTM 9 Glass
Peel Adhesion 90°	11 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service temperature	-40°C to 70°C	

Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates.

Particularly good performance at lower temperatures, e.g. labeling of chilled products.

Applications and use

The products are suitable for a wide range of promotional and industrial label applications where attractive semi-gloss appearance in multi-colour work is required.

Special care should be given during dispensing around the gum free area

Conversion & printing

Facestock is suitable for solid and halftone images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product.

The special product lay-out could have an influence on conversion speed

Special Approvals


The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.

Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

BJ995

Fasson®
MC FSC - S2045N-BG40BR

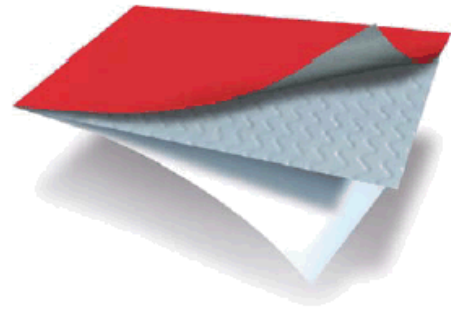

This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com